



TECHNICAL DATA SHEET
FOR
Single Mode Optical Fibre Cable
Aerial Application
(GYXTC8Y- 24F)

www.xcombg.com



ЦЕНТРАЛЕН ОФИС / СКЛАД ПЛОВДИВ

Пловдив 4000
Южна Индустриална Зона,
ул. Братя Бъкстон 134
(зад строителен хипермаркет "Рила")


XCOM LTD - Head office:

Plovdiv city, p.c.-4000, BULGARIA,
South Industrial Zone, "Bratia Bakston 134" str.
xcomeood@gmail.com



1. Cable Construction

1.1 Cable cross-section

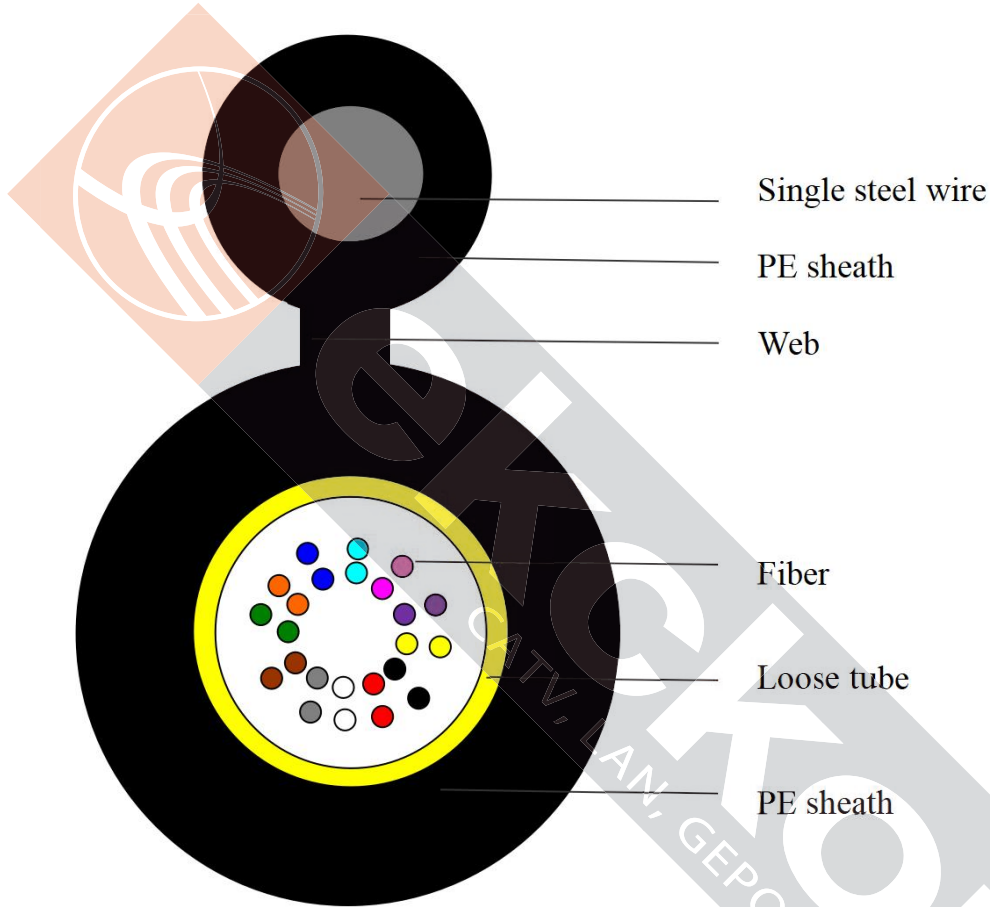

2. Cable Specification

2.1 Sheath marking

KXOFC	2024	GYXTC8Y	XXB1.3 (G.652D)	XXXXm
KXOFC	: Manufacturer's brand			
2024	: Manufacture year			
GYXTC8Y	: Cable type			
XXB1.3 (G.652D)	: XX cores single-mode optical fiber (ITU-T Rec. G.652D)			
XXXXm	: Mark of meters			
*The marking is printed every 1 meter;				
**"G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 Single Mode Optical Fiber.				

2.2 The color of marking is white.

2.3 An occasional unclear of length marking is permitted if both of the neighboring markings are



clear;

2.4 The both cable ends are sealed with heat shrinkable end caps to prevent water ingress.

2.5 Fiber color code

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua

2.6 Color Code for Loose Tube (LT) & Filler Rod (FR)

Fiber count	Element no., name & color code					
	1	2	3	4	5	6
24	LT	/	/	/	/	/

* "LT" means "Loose tube";

2.7 Cable structure and parameter

Items	unit	24 core details
Optical fiber	Type	Single Mode G.652.D
Loose tube	Material	PBT
	Diameter	mm 2.8
Messenger	Material	Single steel wire
	Diameter	mm 1.6
Sheath	Material	HDPE
	Diameter	mm (±0.3) 6.5*10.8
Tension	N	400/1000
Crush	N/100mm	300/1000

* The nominal outer diameter and height may vary by ±0.5mm.

3. Fiber Properties

3.1 The properties of single mode optical fiber (ITU-T Rec. G.652D)

Item	Specification
Fiber type	Single mode
Fiber material	Doped silica
Attenuation coefficient	
@ 1310 nm	≤ 0.36 dB/km
@ 1383 nm	≤ 0.32 dB/km
@ 1550 nm	≤ 0.22 dB/km
@ 1625 nm	≤ 0.30 dB/km
Point discontinuity	≤ 0.05 dB
Cable cut-off wavelength	≤ 1260 nm



Zero-dispersion wavelength	1300 ~ 1324 nm
Zero-dispersion slope	$\leq 0.093 \text{ ps}/(\text{nm}^2 \cdot \text{km})$
Chromatic dispersion	
@ 1288 ~ 1339 nm	$\leq 3.5 \text{ ps}/(\text{nm} \cdot \text{km})$
@ 1271 ~ 1360 nm	$\leq 5.3 \text{ ps}/(\text{nm} \cdot \text{km})$
@ 1550 nm	$\leq 18 \text{ ps}/(\text{nm} \cdot \text{km})$
@ 1625 nm	$\leq 22 \text{ ps}/(\text{nm} \cdot \text{km})$
PMD _Q (Quadrature average*)	$\leq 0.2 \text{ ps}/\text{km}^{1/2}$
Mode field diameter @ 1310 nm	$9.2 \pm 0.4 \text{ }\mu\text{m}$
Core / Clad concentricity error	$\leq 0.5 \text{ }\mu\text{m}$
Cladding diameter	$125.0 \pm 0.7 \text{ }\mu\text{m}$
Cladding non-circularity	$\leq 1.0\%$
Primary coating diameter	$245 \pm 10 \text{ }\mu\text{m}$
Proof test level	100 kpsi (=0.69 Gpa), 1%
Temperature dependence 0°C ~ +70°C @ 1310 & 1550nm	$\leq 0.1 \text{ dB}/\text{km}$

* PMD_Q is a link of 20 cable sections (M) and a probability level of 0.01% (Q).

4. Characteristic of Optical Cable

4.1 Mechanical & environmental characteristics

- 4.1.1 Cable bending radius: 10 x cable diameter (during operation)
20 x cable diameter (during installation)

4.1.2 Temperature range and humidity

Operating temperature range	-40°C to +60°C
Storage / Transport temperature range	-50°C to +70°C
Installation temperature range	-20°C to +50°C

4.2 Main mechanical & environmental characteristics test

NO	ITEM	TEST METHOD	ACCEPTANCE REQUIREMENTS
1	Tensile Strength IEC 794-1-E1	- Load: 1,000 N - Length of cable under load: 50m - Load time: 5 min.	- Loss change $\leq 0.1 \text{ dB @1550 nm}$ - No fiber break and no sheath damage.
2	Crush Test IEC 60794-1-E3	- Load: 1, 000 N/100mm - Load time: $\geq 1\text{min}$	- Loss change $\leq 0.1 \text{ dB @1550 nm}$ - No fiber break and no sheath damage.
3	Impact Test IEC 60794-1-E4	- Points of impact: 5 - Times of per point: 5 - Impact energy: 4.5 Nm	- Loss change $\leq 0.1 \text{ dB @1550 nm}$ - No fiber break and no sheath damage.



		<ul style="list-style-type: none"> - Radius of hammer head: 12.5mm - Impact rate: 2sec/cycle 	
4	Repeated Bending IEC 60794-1-E6	<ul style="list-style-type: none"> - Bending Dia.: 20 x OD - Load: 150N - Flexing rate: 3sec/cycle - No. of cycle: 30 	<ul style="list-style-type: none"> - Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
5	Torsion IEC 60794-1-E7	<ul style="list-style-type: none"> - Length: 1m - Load: 150N - Twist rate: 1min/cycle - Twist angle: ±180° - No. of cycle: 10 	<ul style="list-style-type: none"> - Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
6	Water Penetration IEC 60794-1-F5B	<ul style="list-style-type: none"> - Height of water: 1m - Sample length: 3 m - Time: 24 hour 	<ul style="list-style-type: none"> - No water shall have leaked from the opposite end of cable
7	Temperature Cycling IEC 60794-1-F1	<ul style="list-style-type: none"> - Temperature step: +20°C → -10°C → +70°C → +20°C - Time per each step: 12 hrs - Number of cycle: 2 	<ul style="list-style-type: none"> - Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
8	Compound Flow IEC 60794-1-E14	<ul style="list-style-type: none"> - Sample length: 30 cm - Temp: 70°C ± 2°C - Time: 24 hours 	<ul style="list-style-type: none"> - No compound flow

5. Packing and Marking

5.1 Packing

5.1.1 Each single length of cable shall be reeled on **Non-fumigated wooden Drum** suitable for long distance shipment.

5.1.2 Covered by plastic buffer sheet.

5.1.3 Sealed by strong wooden battens.

5.1.4 At least 1 m of inside end of cable will be reserved for testing.

5.1.5 Drum length

5.1.5.1 Standard drum length is **2000m±5%**;

5.1.5.2 Single length not less than 90% of standard length per drum shall be permitted for quantity not exceeding 10% of the total supply;

5.1.5.3 Total quantity is at least the ordered quantity.

5.2 Marking



5.2.1 Cable drum

- Manufacturer brand;
- Roll-direction arrow;
- Cable outer end position indicating arrow;
- The word "**OPTICAL FIBER CABLE**";
- Origin, The word "**MADE IN CHINA**";
- Caution plate indicating the correct method for loading, unloading and convey the cable;
- *Other customer information such as contract no., project no., and delivery destination. (if needed)*

5.2.2 Marking plate

- Product name;
- Cable type and size;
- Drum length;
- Gross / Net weight in kilograms;
- Drum number in meters;
- Manufacturer's name;
- Manufacturing year and month;
- *Project number, contract number or purchasing order number (if needed).*

5.3 Cable identification documents

- Test report.

-----End-----