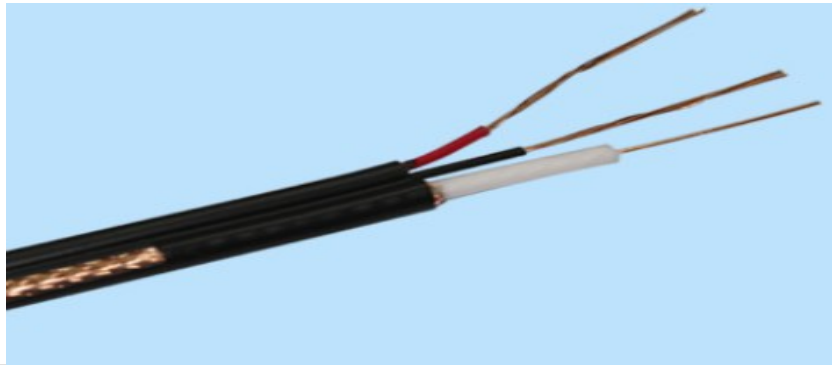


RG59+2*0.75 Cable Specification

ITEM		DESCRIPTION
Conductor	Material	Bare Copper
	Nominal Diameter	0.8mm (0.65mm)
Insulation	Material	Foam PE
	Nominal Diameter	3.7mm
Shielding 1th	Material	Al foil
	Coverage	110%
Braiding	Material	CCA Braiding
	No. of Wires	64*0.12mm
	Coverage	55%
Jacket	Material	PVC
	Nominal Diameter	6.1mm
DC cable	Conductor	24*0.2CCA
	Insulation	1.8mm PVC
		
ELECTRICAL PROPERTIES		
Impedance	75 ohm	
Capacitance	53pF/m	
Velocity of propagation	78 %	
ATTENUATION		
Frequency (MHz)	Attenuation dB (100M)	
50	11.58	
100	15.52	
200	21.54	
330	27.98	
450	33.07	
550	36.85	
750	43.51	
870	47.06	
1000	50.63	
LISTINGS / RATINGS		
Compliant	ISO, CE, UV resistant	
MISCELLANEOUS		
Operating Temperature	-20°C to 60°C	